

### PRODUCT SPECIFICATIONS

WaterSentry Plus High Capacity Replacement Filter. Overall dimensions are 3-1/8" x 3-1/8" x 9-1/2".

<b>Dimensions:</b>	3-1/8" x 3-1/8" x 9-1/2"
<b>Shipping Weight:</b>	2 lbs.
<b>Flow Rate:</b>	1.5 GPM (5.6 L/m)
<b>Capacity:</b>	
<b>Temperature:</b>	40-100°F (4-38°C)
<b>Initial Pressure Drop:</b>	2-5 PSI (14-34 kPa)
<b>Maximum Pressure:</b>	105 PSI (724 kPa)
<b>Minimum Pressure:</b>	20 PSI (138 kPa)
<b>Water Inlet:</b>	3/8" (9.5mm) O.D. tube
<b>Water Outlet:</b>	1/4" (6.4mm) O.D. tube

**Special Note:** Compatible with Enhanced ezH2O Bottle Filling Stations

- Replacement filter for Elkay enhanced ezH2O bottle filling stations.
- Largest capacity filter reduces filter changes and maintenance costs for healthy hydration without the hassle.
- Designed for use in highly trafficked areas; filter should be replaced every 6,000 gallons or 1 year after installation.
- Equipped with quick-disconnect, ¼-turn installation, as well as automatic inlet shut-off valve that closes when filter is removed.
- Designed to reduce lead, cyst, particles and chlorine. Also reduces odors from incoming water.
- Spun Polypropylene prefilter mesh to prevent large, coarse sediment and particles from entering and clogging filter media.
- Filter is certified to NSF 42 and 53 for lead, cyst, particulate class 1, chlorine, taste and odor reduction.





**AMERICAN PRIDE. A LIFETIME TRADITION.**  
Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.



**Product Compliance:** NSF 42  
NSF 53  
NSF 372 (lead free)



Drains are listed by IAPMO<sup>®</sup> as meeting the applicable requirements of the Uniform Plumbing Code<sup>®</sup>, International Plumbing Code<sup>®</sup>, and National Plumbing Code of Canada.

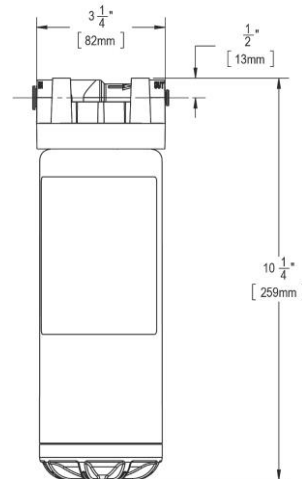

PART: \_\_\_\_\_ QTY: \_\_\_\_\_

PROJECT: \_\_\_\_\_

CONTACT: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_

APPROVAL: \_\_\_\_\_

*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](http://elkay.com) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*