



INSTALLATION, OPERATION & MAINTENANCE INSTRUCTIONS

1455 Kleppe Lane ♦ Sparks, NV 89431-6467 ♦ (775) 359-4712 ♦ Fax (775) 359-7424
HAWS AG ♦ Bachweg 3 ♦ CH-3401 Burgdorf ♦ Switzerland
Haws Mfg. Pte Lt. ♦ 74 Sungei Kadut Loop ♦ Singapore 729531
E-mail: haws@hawsco.com ♦ website: www.hawsco.com

No. 2080380 (1)

Model TWBS.EW.H Tempered Water Blending System

NOTE TO INSTALLER: Please leave this information with the Maintenance Department.

LIMITED WARRANTY

HAWS warrants that all of its products are guaranteed against defective material or poor workmanship for a period of **one year from date of shipment**. HAWS liability under this warranty shall be discharged by furnishing without charge F.O.B. HAWS Factory any goods, or part thereof, which shall appear to the Company upon inspection to be of defective material or not of first class workmanship, provided that claim is made in writing to company within a reasonable period after receipt of the product. Where claims for defects are made, the defective part or parts shall be delivered to the Company, prepaid, for inspection. HAWS will not be liable for the cost of repairs, alterations or replacements, or for any expense connected therewith made by the owner or his agents, except upon written authority from HAWS, Sparks, Nevada. HAWS will not be liable for any damages caused by defective materials or poor workmanship, except for replacements, as provided above. Buyer agrees that Haws has made no other warranties either expressed or implied in addition to those above stated, except that of title with respect to any of the products or equipment sold hereunder and that HAWS shall not be liable for general, special, or consequential damages claimed to arise under the contract of sale.

The emergency equipment manufactured by HAWS is warranted to function if installation and maintenance instructions provided are adhered to. The units also must be used for the purpose, which they were intended. This product is intended to supplement first-aid treatment. Due to widely varying conditions HAWS cannot guarantee that the use of this emergency equipment will prevent serious injury or the aggravation of existing or prior injuries.

NO OTHER WARRANTIES EXPRESSED OR IMPLIED ARE AUTHORIZED, PROVIDED OR GIVEN BY HAWS.

SHOULD YOU EXPERIENCE DIFFICULTY WITH THE INSTALLATION OF THIS MODEL, PLEASE CALL:

1-800-766-5612

**(U.S.A. AND CANADA ONLY) MONDAY-THURSDAY: 6:00 A.M. – 4:00 P.M. PST
FRIDAY: 6:00 A.M – 1:00 P.M. PST**

I. What is the HAWS TWBS.EW.H?

The HAWS TWBS.EW.H is an instantaneous water heating system for use on emergency eyewashes where hot water is not supplied. When there is a demand for water at the eyewash, the heater will instantaneously heat the water to 80° F. The unit requires 480 VAC, 3 phase, 22 AMP to power the heater. The Haws TWBS.EW.H incorporates thermally activated and pressure activated safety features that prevent scalding and improper flow to the eyewash, even in the event of main unit failure.

II. How does the TWBS.EW.H operate?

The heart of the TWBS.EW.H is an instantaneous heater that maintains the output water temperature at 80° F. On the warm water outlet we include a high limit shut off valve, which reads the output temperature. When the output temperature exceeds the factory pre-set limit of 95° F., the valve shuts down the output from the heater.

On the cold-water side, we include a pressure bypass valve, which is responsive to the pressure differential between the cold water supply and the output of the heater. Should the heater become blocked or the high limit shut off valve closes, the bypass valve will open, allowing the incoming cold water to bypass the system and proceed directly to the eyewash.

These two back-up components permit the temperature level of the heated water to be maintained and permit the flow of cold water should the heater fail.

III. Performance Features of the HAWS TWBS.EW.H System

Essentially, the HAWS TWBS.EW.H provides fail-safe protection against scalding or blocked flow. There are two types of failures that can occur with any water heating system. They are as follows:

1. The heater can fail and provide an unregulated flow of hot water.
2. The heater can fail so as to provide an insufficient and/or blocked flow of warm water.

The unique HAWS TWBS.EW.H answers the previous two failure modes in the following manner:

Fail-safe Performance Mode # 1 - Too much Hot Water

The primary safety in the HAWS TWBS.EW.H is the high limit hot shut-off valve, or the temperature limit control valve which measures outlet temperatures and restricts water from rising past 95° F. This high limit shut-off valve is not-adjustable (tamperproof) and provides a regulated reduction in the temperature level of the discharge flow. This high temperature limit valve provides a stop in flow in the event of heater malfunction (i.e. too much hot water).

Fail-safe Performance Mode # 2 - Blocked Flows

In the event that water flow through the main mixing valve is obstructed altogether, resulting in a significant reduction in the flow rate out of the discharge line, the flow limit control valve (bypass valve) responds to this pressure differential (set for 25 psi) and permits the complete bypass and flow of cold water through the system.

The HAWS TWBS.EW.H is designed to accurately, reliably, and safely heat hot and cold water to provide warm water for emergency eyewash. It features two back-up conditions that assist in controlling the discharge flow rate and temperature in the event of a heater malfunction.

IV. Capacity

HAWS TWBS.EW.H produces up to 2.5 gpm and requires 35-psi dynamic pressure. The warm water heater is designed to activate by individual electronic flow switches, at a minimum flow of no less than 1.5 gpm. This unit is sized for one eyewash.

Max output @ 480V	Current per phase	Temperature Rise (°F)					
		1.5 gpm	2.0 gpm	2.5 gpm	3.0 gpm	3.5 gpm	4.0 gpm
18 kw	22 AMPS	82	61	49	41	35	31

V. INSTALLATION

A). APPLICATION

The standard TWBS.EW.H is sized to heat enough water for one eyewash at a time. This Water Heating System should be installed in close proximity to the eyewash. It should be clearly identified, with easy access and free from obstructions. Supply lines must be heat traced if subject to freezing temperatures. If the piping network is through a cold area, piping should be heat-traced with self-regulating heat tape. Any heat-traced piping should be protected with scald protection bleed valves. Additionally, should the TWBS.EW.H be mounted at a distance greater than 50 feet from the eyewash, these runs should be evaluated by a plumbing engineer. Complicated chains of eyewashes, long piping runs and recirculating loops should all be evaluated by a qualified engineer.

B). RECOMMENDED TOOLS

Pipe joint sealant, adjustable pipe wrenches, (4) rust resistant wall anchors (3/16" diameter).

C). WATER SUPPLY

The minimum recommended supply lines are ½" IPS COLD. Cold supply temperatures should range from 35°F to 75°F. A minimum of 2.5 gpm at 35 psi dynamic pressure must be provided. Outlet connection is a ½" IPS dielectric union. We recommend a manual bypass loop with appropriate tamper resistant shut-off valves to allow for heater water system maintenance or service without interrupting emergency eyewash operation.

D). PROCEDURE USE PIPE SEALANT ON ALL WATER CONNECTIONS

Step 1: Mount unit on wall per attached installation drawing. Bolt dia. 3/16" fasteners through heater box.

Step 2: Flush supply piping prior to connecting to inlet unions. Connect outlet union to piping leading to eyewash. Check for leaks.

Step 3: **TEST FUNCTION OF UNIT**

Turn on eyewash. Carefully monitor initial few minutes of flow with hand in eyewash flow. Check to insure initial flow does not contain brief shots of hot water. If any problems, see troubleshooting.


IMPORTANT: REPEAT TEST PROCEDURE WEEKLY!

VI. TROUBLE-SHOOTING

TROUBLESHOOTING	
PROBLEM	REPAIR CHECKLIST
1. COLD WATER LEAVING HEATER.	1. a. Insure unit is wired to proper breaker and wire size. b. Insure flow through heater is sufficient to activate flow switch. Minimum flow of 1.0 gpm is required. c. Too much flow through heater, unit is designed to handle a maximum of 2.5 gpm.
2. OUTPUT TOO HOT.	2. If high limit shut-off valve is constantly closing, consult factory for additional help.

VII. REPLACEMENT PARTS

Description	Quantity
Temperature Gauge, 1/2"	1
Heater	1
Bypass Valve, 1/2"	1
Hot Shut-off Valve, 1/2"	1

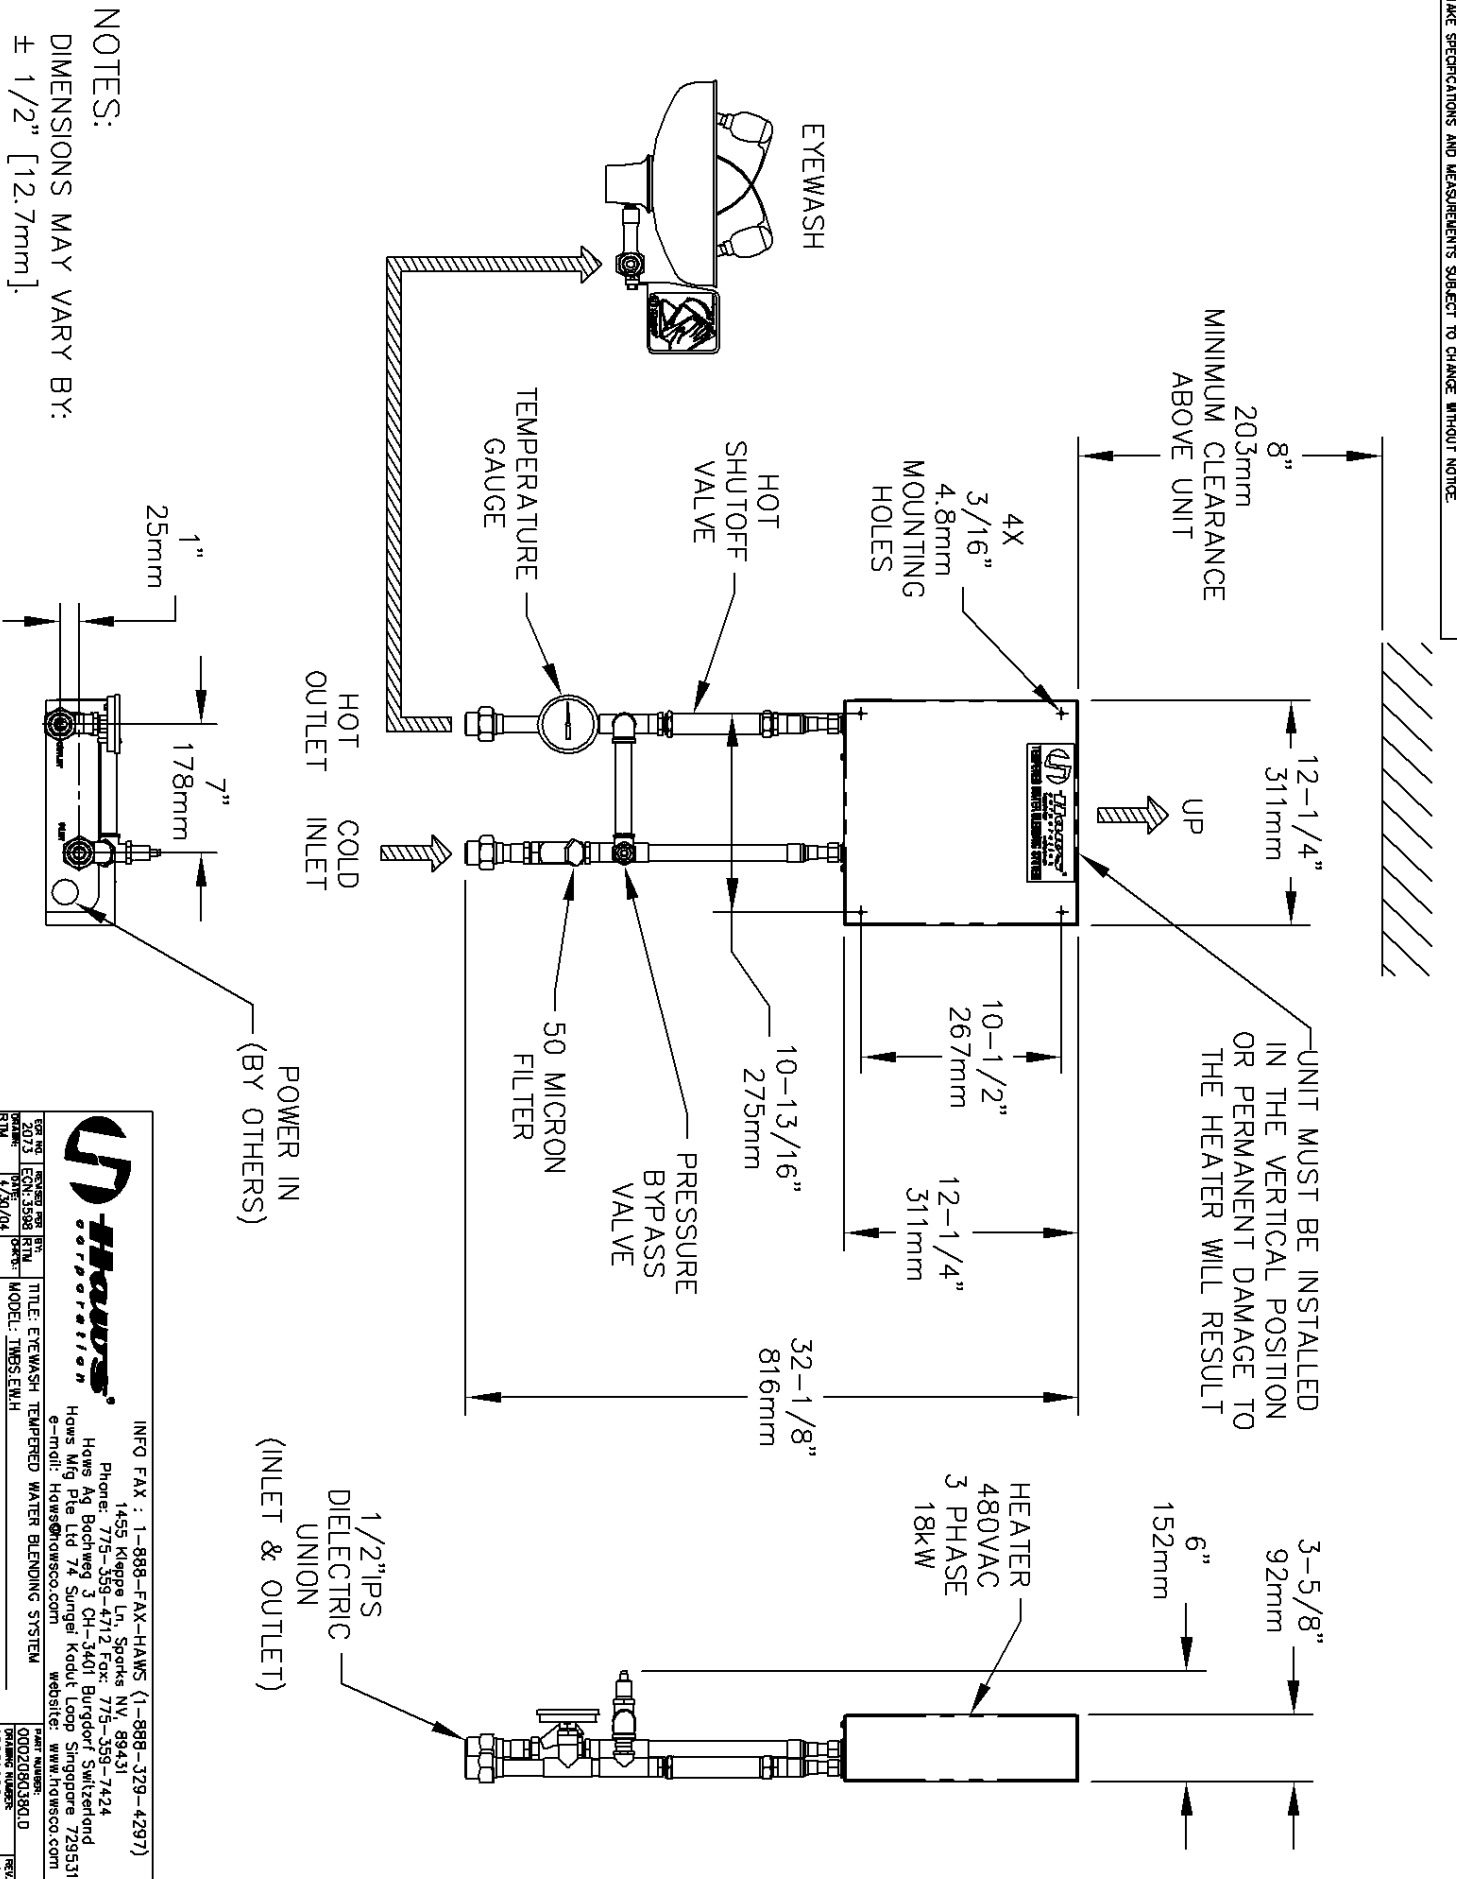

NOTES:
DIMENSIONS MAY VARY BY:
± 1/2" [12.7mm].

Haus corporation

INFO FAX : 1-888-FAX-HAWS (1-888-379-4297)

1455 Klippe Ln, Sparks NV, 89431
Phone: 775-359-4712; Fax: 775-359-7424
Haus Ag, Bachweg 3 CH-3401 Burgdorf Switzerland
Haus Mfg Pte Ltd 74 Sungai Kodul Ledge Singapore 729531
e-mail: Haus@hausco.com website: www.hausco.com

TITLE: EYEWASH TEMPERED WATER BLENDING SYSTEM
MODEL: TMBSEWH
INFO FAX DOC # 28927384

DATE: 1/20/04
DRAWN BY: RML
CHECKED BY: RML
SCALE: NONE
DRAWING TYPE: INSTALLATION/ASSEMBLY

0002080180.0
FRAMES: 1
12681A00