

ROUGHING IN DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA. (0192-1)




2100 SOUTH CLEARWATER DRIVE
DES PLAINES, ILLINOIS 60018-5999

FITTING NO.
9400
SUBMITTED MODEL NO.

JOB NAME

ITEM NO.

SUBMITTED AS SHOWN	
SUBMITTED AS NOTED	
SEE ATTACHED FOR SUBMITTED MODIFICATION	

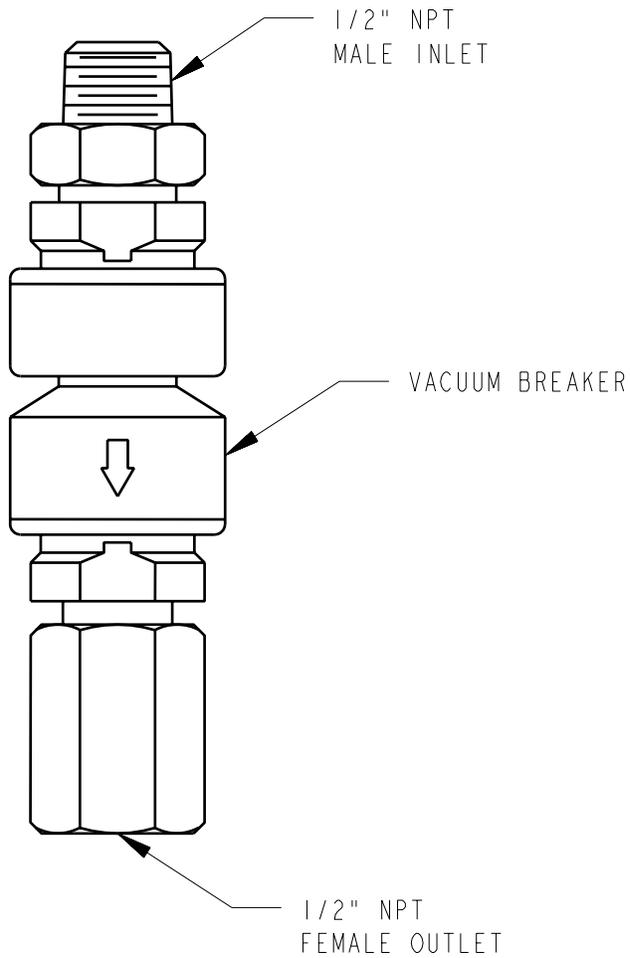

NOTES:

1. THIS VACUUM BREAKER IS A BACKSIPHONAGE PREVENTER THAT IS DESIGNED FOR CONTINUOUS PRESSURE APPLICATIONS. IT MUST BE INSTALLED IN AN UPRIGHT POSITION. BECAUSE LOCAL, STATE AND FEDERAL CODE REQUIREMENTS VARY, BE SURE TO OBTAIN AUTHORITY APPROVAL ON THE USE AND APPLICATION OF THIS MODEL BEFORE INSTALLATION.
2. THE VACUUM BREAKER SHOULD BE INSTALLED AT THE FURTHER MOST DOWNSTREAM END OF THE SUPPLY PIPE OR FIXTURE WHERE TEMPORARY SPILLAGE DUE TO CRITICAL FLOW PRESSURE CONDITIONS CAN BE DISCHARGED HARMLESSLY.

TECHNICAL DATA

- VACUUM BREAKER FOR HAND HELD EYE/FACE/BODY SPRAY FITTINGS
- FINISH: NO FINISH

DATE: 4-11-02
BY: JAR
CHK'D:
APP'D:
REV: A

9400