



EMERGENCY FIXTURE VALVES

TEPID WATER

SE-350

DUAL PROTECTION

The Speakman SE 350's twin thermostatic elements respond independently to incoming hot and cold water temperatures and provide backup protection against element failure.

BENEFITS

- Comfortable, tempered water for emergency fixtures encourages proper usage.
- Twin thermostatic elements provide backup protection against element failure.
- High-Low flow capability.
- Installs into existing plumbing lines.
- Easy to replace thermostatic cartridges.
- Triple thermometers allow hands-off testing.

POSITIVE HOT WATER SHUT-OFF

Should the cold water supply to the valve fail, the SE 350 will shut-off all incoming hot water.

LOW-FLOW CAPABILITY

The SE 350 provides tempered water from 3 to 60 gpm to meet your needs. The low-flow capacity allows the valve to deliver safe, tempered water to a single eye/face wash station or up to three drench showers from a single unit.

PERFORMANCE

The SE 350 controllers will maintain outlet temperature to within 5°F.



SE-350
1-3 Drench Shower Units
3 - 60 gpm

COMPLIES WITH ANSI Z358.1-1998.



SE-362
Combination Drench and
Eyewash Units

THERMOSTATIC MIXING VALVE

The Water Controller thermostatically mixes hot and cold water for emergency eye wash units.

BENEFITS:

- Provides tempered water for drench showers and eyewash units.
- Low-flow capability.
- Installs into existing plumbing lines.
- Easy to replace thermostatic cartridge.
- Hands-off testing.

FEATURES:

- Powerful liquid thermal thermostat.
- Compensates for supply line temperature and pressure changes.
- Outlet flow is full cold upon thermostat failure.
- Inlets can be attached from the bottom.
- Tamper-resistant control adjustment.
- Rugged design equipped with stainless steel piston and liner.
- Valve can recirculate both hot and cold water.
- Easy-maintenance.

SE-362

. RETRO-FITS INTO EXISTING SYSTEMS

SE-370

LOW-FLOW CAPABILITY


Speakman's SE 370 is your solution for virtually every emergency eye/face wash fixture.

BENEFITS:

- Safely control water temp to as little as 2 gpm
- Provides tempered water for emergency eye/face wash fixtures.
- Low-flow capability.
- Installs into existing plumbing lines.
- Hands-off testing.

FEATURES:

- Powerful liquid filled thermostat.
- Compensates for supply line temperature and pressure changes.
- Outlet flow is full cold upon thermostat failure.
- Tamper-resistant control adjustment.
- Easy-maintenance

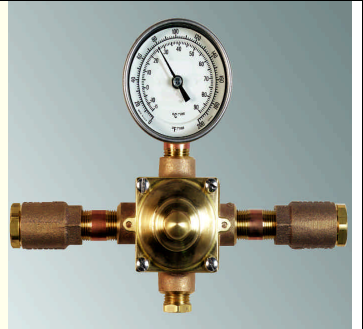

SE-370
Single Eye/Face Wash Units

SPEAKMAN®

SPEAKMAN COMPANY

P.O. Box 191, Wilmington, DE 19899

Phone: 800-537-2107 Fax: 800-977-2747

www.speakmancompany.com