

SPEAKMAN®

SE-628

SAFE-T-ZONE® EMERGENCY SHOWER AND EYEWASH

DESCRIPTION


Floor mounted emergency deluge shower and aerated eyewash combination unit. Shower is supplied with a 1" NPTF stay open full flow ball valve, activated by triangular pull handle. Eyewash is supplied with 1/2" NPTF stay open full flow ball valve, activated by push handle.

SPECIFICATIONS

- Showerhead:** 8" diameter stainless steel
- Flow Control:** Internal 20 gpm restrictor
- Valve:** 1" NPT female stainless steel.
- Full flow stay-open ball valve
- Activator:** Stainless steel triangular pull rod
- Stanchion:** 1 1/2" stainless steel, 18 gauge tubing
- Inlet & Waste:** 1 1/4" NPT male
- Finish:** Stainless steel
- Performance:** 20 gpm @ 20 psi
- EYEWASH: SE-580**
- Bowl:** Yellow ABS plastic
- Spray Heads:** (2) aerated yellow ABS plastic spray outlets with flip-top dust caps
- Valve:** 1/2" NPT female stainless steel
- Activator:** Stainless steel push handle
- Inlet:** 1/2" NPT female
- Performance:** 3.6 gpm @ 30 psi
- Compliance:** ANSI Z358.1
- Universal Emergency Sign Included**

OPTIONS

- XPR Extended pull rod
- FLW Flow switch
- HS Hand-held spray
- FPV Freeze protection valve
- TS Top supply
- SPV Scald protection valve

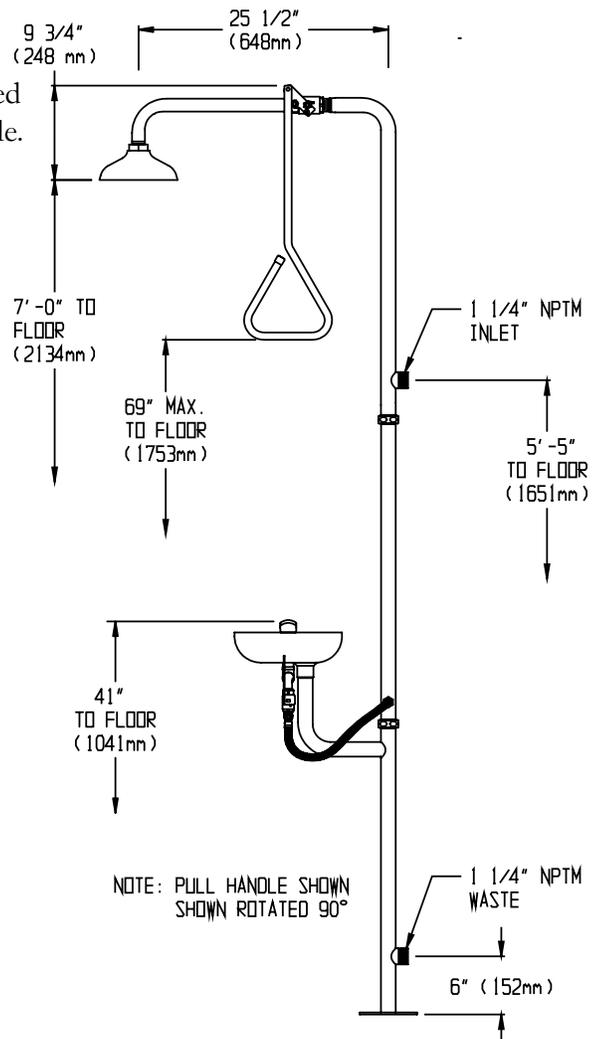

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____