

SPEAKMAN®

SE-697-ADA

COMBINATION SHOWER & EYE WASH

DESCRIPTION

The SE-697-ADA Safe-T-Zone® features an eyewash with dual aerated spray outlets, flip top dust caps and round bowl combined on a powder coated galvanized steel stanchion with an impeller action deluge showerhead that is activated by a high visibility yellow pull rod. Unit designed for ADA accessibility.

SPECIFICATIONS

Showerhead: 8" Cicolac® yellow plastic
Flow Control: Internal 20 gpm regulator
Valve: 1" NPT female brass, chrome plated.
Full flow stay open ball valve.
Activator: Extended powder coated yellow, aluminum triangular pull rod.
Stanchion: 1¼" IPS galvanized steel piping with brass fittings
Inlet & Waste: 1¼" NPT female
Performance: 20 gpm @ 20 psi
Finish: Dura Jade powder coated finish


EYEWASH: SE-580

Bowl: Yellow ABS plastic
Spray Heads: (2) aerated yellow ABS plastic spray outlets with flip-top dust caps
Valve: ½" NPT female brass, chrome plated full flow stay-open ball valve
Activator: Stainless steel push handle
Performance: 3.6 gpm @ 30 psi
Compliance: ANSI Z358.1

Universal Emergency Sign Included

OPTIONS

- FPV Freeze protection valve
- SPV Scald protection valve
- FLW Flow switch
- HS Hand held spray
- TS Top supply
- SSH Stainless steel showerhead
- SPR Stainless steel pull rod
- SSBV Stainless steel ball valves
- BH Chrome plated brass showerhead

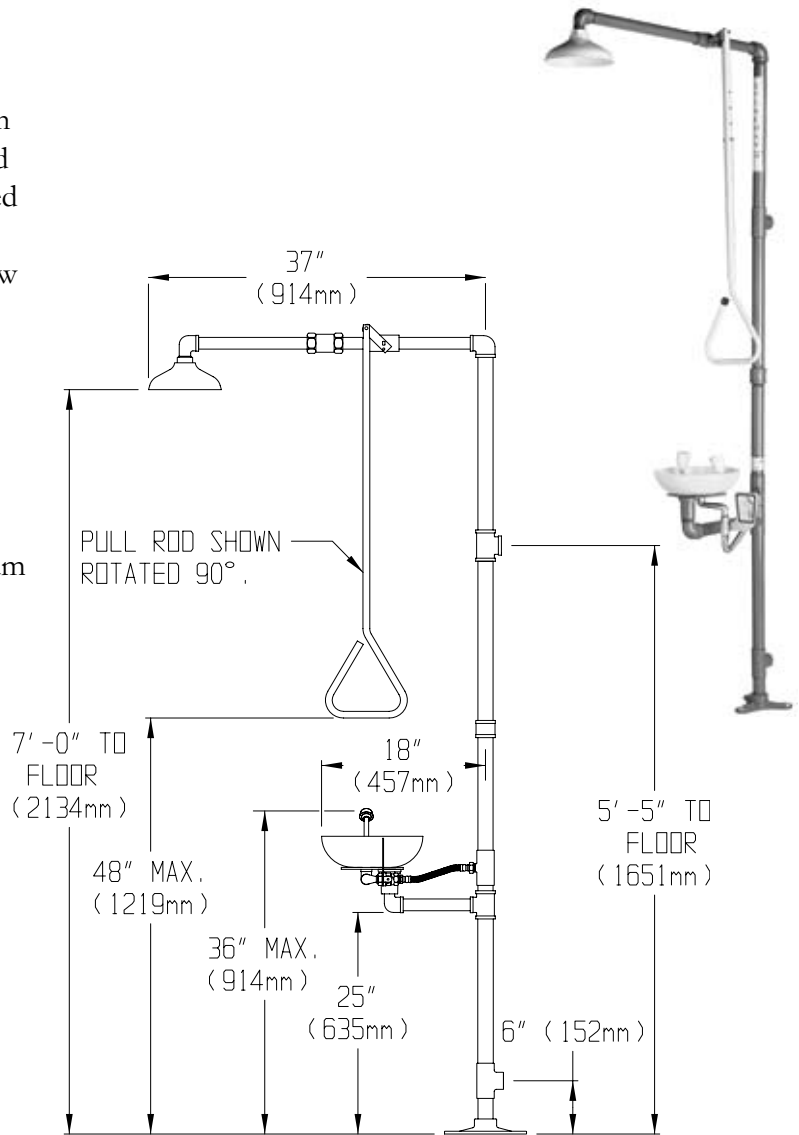

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____