

APPLICATION:

PRODUCT NAME:

8" ADJUSTABLE WALL MOUNT UTILITY SPRAY

JOB NAME:

SPECIAL CONFIGURATION
(CHECK BASE MODEL AND OPTIONS)

QUANTITY:ITEM NO.

MODEL:

2260

OPTIONS OR MODIFICATIONS

- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
- ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE
- BACKFLOW PREVENTER
- PIPE HOOK
- NIPPLES
- ELBOWS
- BRUSH
- VANDAL RESISTANT KIT
- HANDLES (CROSS OR WRIST) CIRCLE STYLE
- OTHER _____

FEATURES:

CONTROL VALVE

- *ECCENTRICS ADJUST FROM 7-1/2" TO 8-1/2"
- *INTERNAL SPRING LOADED CHECK VALVES
- *SWIVELLING SEAT DISKS
- *HOT SIDE STEM - RIGHT HAND
- *COLD SIDE STEM - LEFT HAND
- *STAINLESS STEEL SEATS
- *STAINLESS STEEL SEAT SCREWS
- *STAINLESS STEEL HANDLE SCREWS

HOSE

- *60" LENGTH
- *STAINLESS STEEL END FITTINGS
- *STAINLESS STEEL EXTERNAL JACKET
- *3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
- *REPAIRABLE IN FIELD WITH SIMPLE TOOLS

UTILITY SPRAY VALVE

- *NOZZLE THREADED INTO VALVE
- *2.65 GPM AT 80 PSI
- *SHOWER SPRAY PATTERN
- *45° ANGLED HEAD

SWIVEL ELBOW


- *360° TURNING RADIUS
- *ATMOSPHERIC VACUUM BREAKER

SYSTEM LIMITS


- *TEMP: 40°F MIN. TO 140°F MAX.
- *PRESSURE 200 PSI MAX. STATIC

SHIPPING WEIGHT

*9.0 LBS

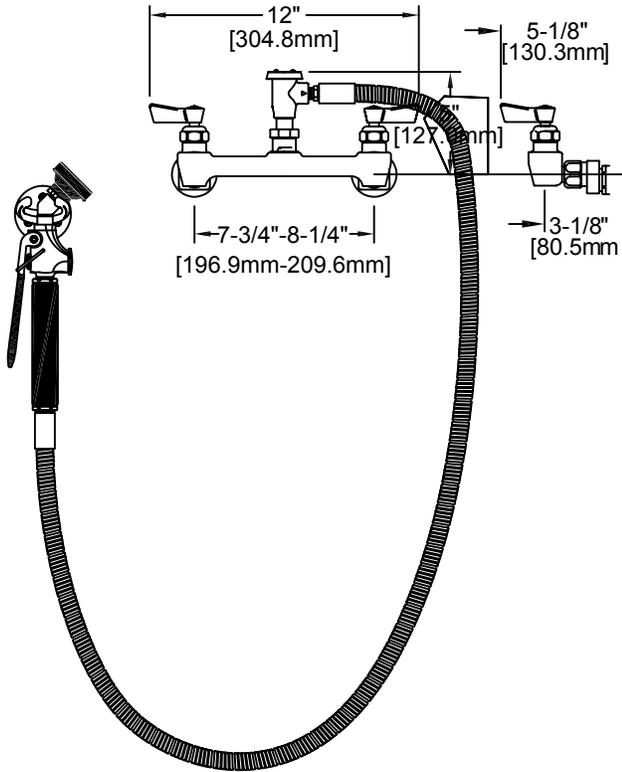

ROUGH-IN:

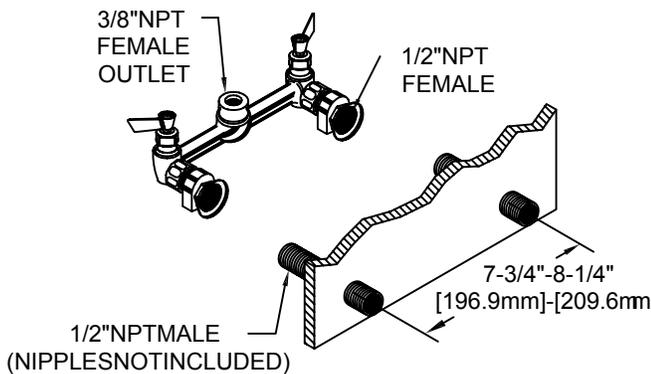

FISHER

FISHER MANUFACTURING COMPANY

TOLL FREE: 800-421-6162 - FAX: 800-832-8238

information@fisher-mfg.com - www.fisher-mfg.com



ANSI/A112.18.1M