# OASIS
## OASIS INTERNATIONAL

# Water Coolers

## CUSPIDOR

# FLF221PM

## Model
FLF221PM is a non-refrigerated, fully-recessed stainless steel cuspidor for direct connection to a cold water supply.

## Standard Features
> Waterways are Lead-Free in Materials & Construction
> Satin Finish Stainless Steel Surfaces
> Single Push-Button On Fountain Front Keeps Water Flowing While Button Is Depressed
> Removable Chrome-Plated Brass Drain Strainer
> Product Certified to NSF/ANSI Standard 61, Annex G (AB1953)
> Limited 1-Year Warranty

## Finishes
> Standard cabinet finish: Stainless Steel

## Installation
> Prior to roughing-in, consult local, state and federal codes for proper mounting height.
> Drinking fountain and cuspidor are furnished with separate wall-mounted sleeves for easy installation
> Shipped with complete instructions

## Net Weight
> Approximately 34 lbs.

Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

**Limited 1-Year Warranty** (Continental limits of the United States and Canada): One year from date of installation on parts only. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

**Export Warranty:** One year on component parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of <=0.25%) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953).

Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards.

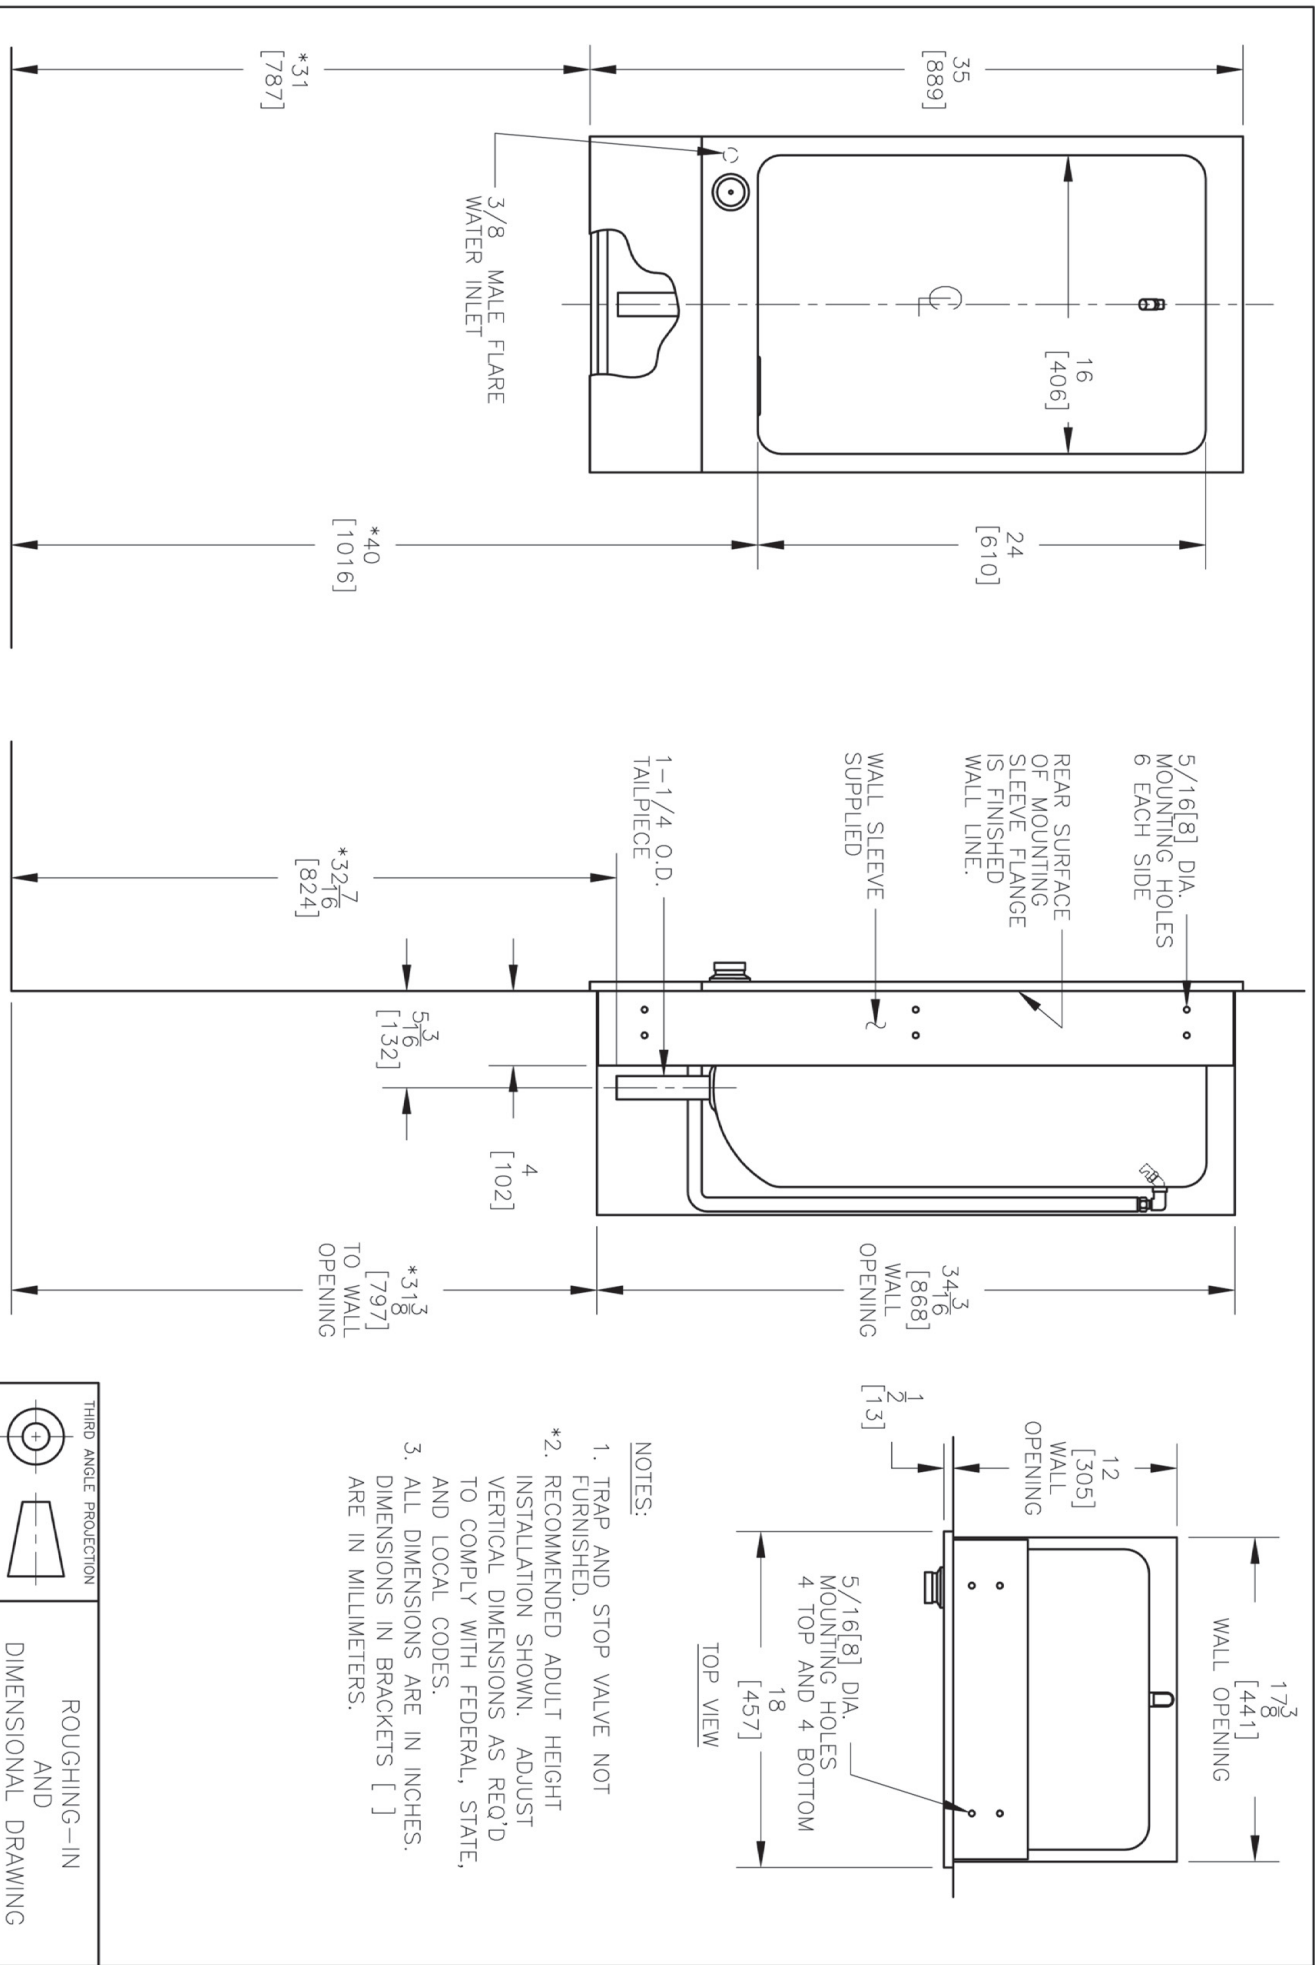| Physical Dimensions In Inches | | | | | | |
|---|---|---|---|---|---|---|
| Model | Style | Height | Width | Depth | Extended From Wall | Recessed Into Wall |
| FLF221PM | Fully Recessed | 35" | 18" | 11" | 1/2" | 10 1/2" |

Specifications subject to change without notice

# OASIS™ FULLY-RECESSED CUSPIDOR MODEL FLF221PM

35
[889]

16
[406]

24
[610]

*31
[787]

*40
[1016]

3/8 MALE FLARE
WATER INLET

5/16[8] DIA.
MOUNTING HOLES
6 EACH SIDE

REAR SURFACE
OF MOUNTING
SLEEVE FLANGE
IS FINISHED
WALL LINE.

WALL SLEEVE
SUPPLIED

1-1/4 O.D.
TAILPIECE

$5\frac{3}{16}$
[132]

4
[102]

$34\frac{3}{16}$
[868]
WALL
OPENING

$*32\frac{7}{16}$
[824]

$*31\frac{3}{8}$
[797]
TO WALL
OPENING

$\frac{1}{2}$
[13]

12
[305]
WALL
OPENING

5/16[8] DIA.
MOUNTING HOLES
4 TOP AND 4 BOTTOM

$17\frac{3}{8}$
[441]
WALL OPENING

18
[457]

TOP VIEW

## NOTES:

1. TRAP AND STOP VALVE NOT
   FURNISHED.
*2. RECOMMENDED ADULT HEIGHT
    INSTALLATION SHOWN. ADJUST
    VERTICAL DIMENSIONS AS REQ'D
    TO COMPLY WITH FEDERAL, STATE,
    AND LOCAL CODES.
3. ALL DIMENSIONS ARE IN INCHES.
   DIMENSIONS IN BRACKETS [ ]
   ARE IN MILLIMETERS.

THIRD ANGLE PROJECTION

OASIS
OASIS INTERNATIONAL

ROUGHING-IN
AND
DIMENSIONAL DRAWING