

Application

Designed for installation on commercial and residential water lines as a positive stop for interior and exterior applications.

Approvals

Meets the requirements of NSF/ANSI 372

Materials

Main valve body Low Lead Cast Bronze
ASTM B584
Elastomers Neoprene
Fasteners Stainless steel, 300 series

Features

Sizes: 1/2", 3/4"
Maximum working water pressure 125 PSI
Maximum working water temperature 140°F
End connections Threaded ANSI
B1.20.1

Domestically manufactured




NSF/ANSI 372

Options

(Suffixes can be combined)

- BFP-9 hose connection vacuum breaker

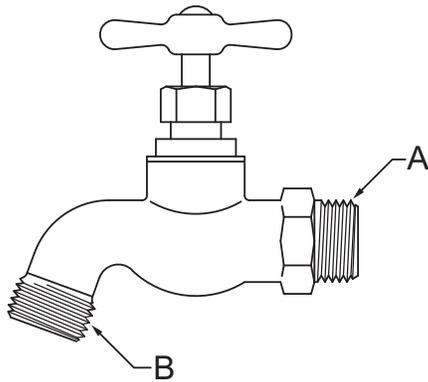

PIPE SIZE	A	B	WEIGHT	
			lbs.	kg
1/2"	1/2-14NPT	3/4" NPHS	1	0.5
3/4"	3/4-14NPT	3/4" NPHS	1	0.5