

COMMANDER®

SC-7121



SC-7122



Healthcare Fittings

GENERAL SPECIFICATION

Polished chrome plated Commander two handle laboratory faucet with 1/4 turn ceramic cartridges covered by a 25-year warranty. Accommodates installations up to 2-1/4" thick. 5-1/4" deep gooseneck spout, rigid or swivel. Vandal-resistant flow control reduces flow to 2.2 gpm/8.4 lpm. Meets ASME A112.18.1/CSA B125.1 and NSF61.

□ SC-7121

Laboratory faucet with vandal-resistant four arm handles.

□ SC-7122

Laboratory faucet with vandal-resistant lever handles.

OPTIONS

SUFFIX	DESCRIPTION
□ BO	0.5 gpm flow control, vandal-resistant
□ CA**	No lead for CA AB1953 compliance
□ FC*	2.0 gpm laminar flow control, plain end spout
□ GB	1.5 gpm flow control, vandal-resistant
□ LF	2.2 gpm laminar flow control outlet
□ MI	Metal index for handles
□ SO	Rose spray outlet
□ 4*	3-3/4" deep spread gooseneck spout, rigid or swivel
□ 8*	8" deep spread gooseneck spout, rigid or swivel
□ 9*	9" deep tubular swing spout, rigid or swivel
□ 12*	12" deep tubular swing spout, rigid or swivel
□ VB6*	6" deep rigid vacuum breaker spout
□ VB8*	8" deep rigid vacuum breaker spout

VACUUM BREAKER OPTIONS

SUFFIX	DESCRIPTION
□ ST	Serrated tip
□ SW	Swivel spout

*See page 177 for optional spout specifications


** The following options are not available with the "CA" option:
SO, TWI, VB6, VB8, ST, SW, & TMV.

This space for Architect/Engineer approval.




Rough-Ins

SC-7121

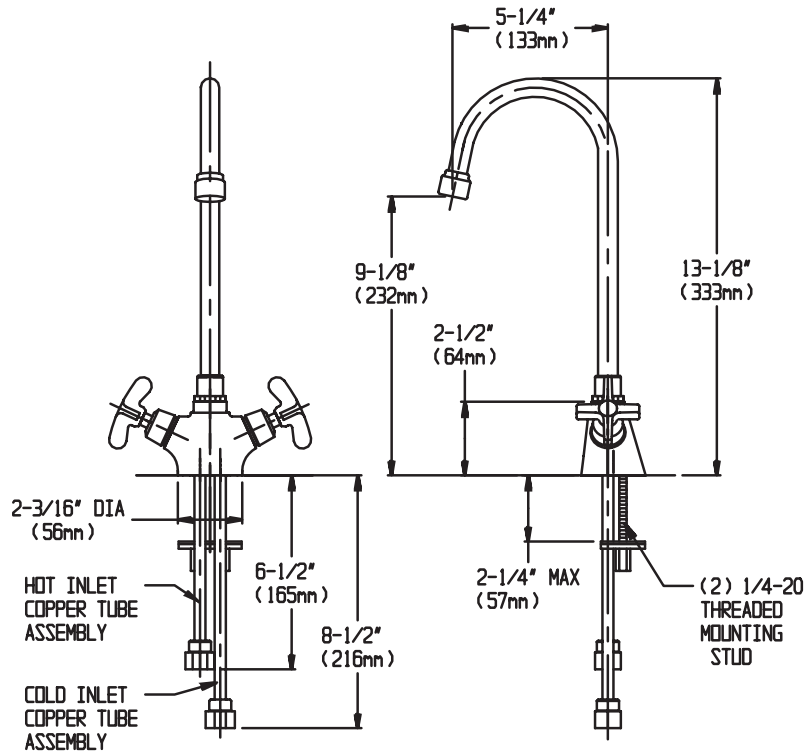

SC-7122

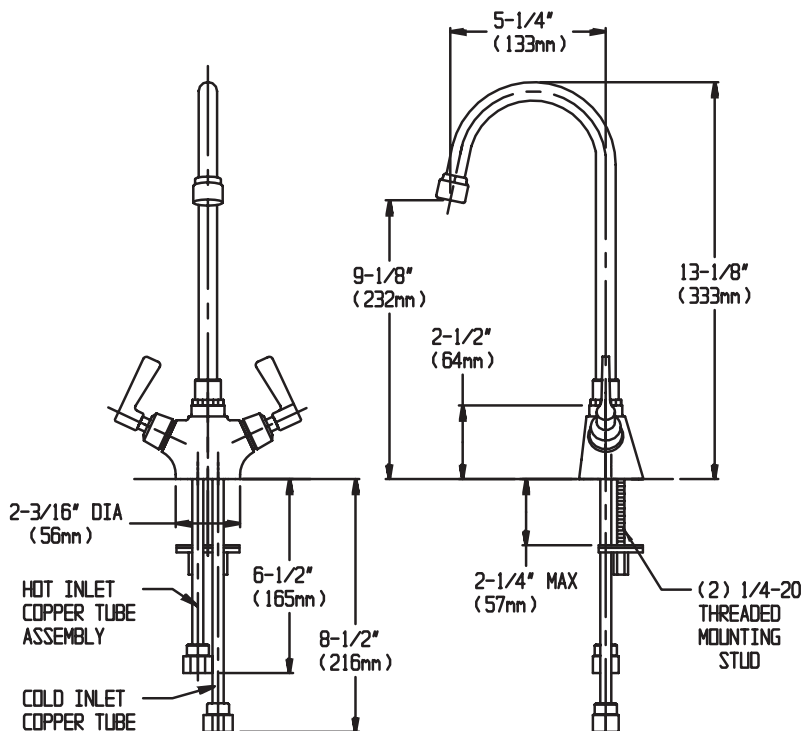

NOTE: Unless otherwise specified, all inlets are 1/2" NPSM. Inlets are sized for coupling connections. All dimensions are in inches unless otherwise specified and are subject to change without notice.




Spout -4, rigid or swivel
 3-3/4" deep gooseneck



Spout -4FC, rigid or swivel
 3-3/4" deep plain end gooseneck;
 laminar flow in base of spout



Spout -5, rigid or swivel
 5-1/4" deep gooseneck

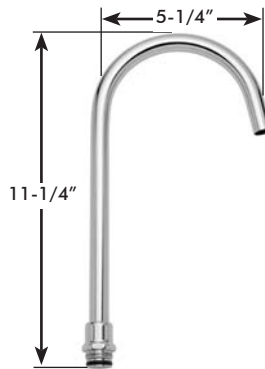

Spout -5FC, rigid or swivel
 5-1/4" deep plain end gooseneck;
 laminar flow in base of spout




Spout -8, rigid or swivel
 8" deep gooseneck




Spout -8FC, rigid or swivel
 8" deep plain end gooseneck;
 laminar flow in base of spout




Spout -9, rigid or swivel
 9" deep tubular swing spout

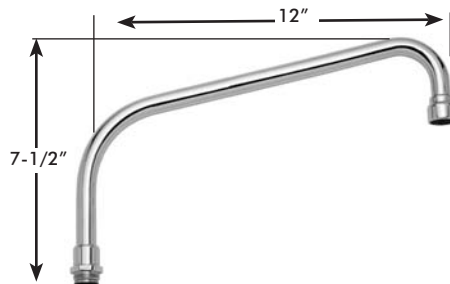


Spout -12, rigid or swivel
 12" deep tubular swing spout




Spout -VB6, rigid
 6" deep rigid vacuum breaker spout

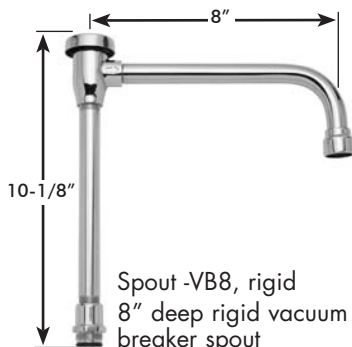

Spout -VB8, rigid
 8" deep rigid vacuum
 breaker spout



Spout -SWVB6, swivel
 6" deep swivel vacuum
 breaker spout

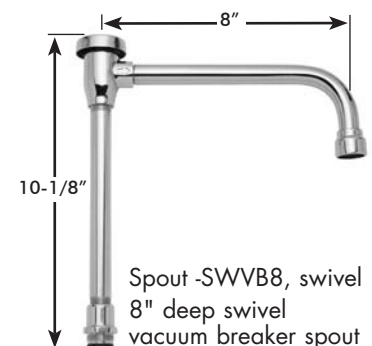

Spout -SWVB8, swivel
 8" deep swivel
 vacuum breaker spout