

Mortuary Fitting

Product Type

Mortuary Fitting

Features & Specifications

- Aspirator with Open Sight Drain
- 6" Metal Wristblade Handles with Secured Red and Blue Service Buttons
- Quatern™ Operating Cartridge
- 1/2" NPSM Supply Inlets with Coupling Nut for 3/8" or 1/2" Flexible Riser
- Quick Disconnect Socket and Plug
- Atmospheric Vacuum Breaker, Not Intended For Continuous Pressure Applications

Performance Specification

- Rating Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140°F

Warranty

- Lifetime Limited Faucet Warranty
- 5-Year Limited Cartridge Warranty
- 1-Year Limited Finish Warranty

Compliant To

- ASME A112.18.1M
- CSA B125.1
- NSF 61, Section 9
- ADA ANSI/ICC A117.1

Job Name _____

Item Number _____

Section/Tag _____

Model Specified _____

Architect _____

Engineer _____

Contractor _____

Submitted as Shown Submitted with Variations

Date _____




349-80102CP

Mortuary Fitting

Architect/Engineer Specification

Chicago Faucets No. 349-80102CP, polished chrome plated solid brass construction. 6" C-C with adjustable height atmospheric vacuum breaker spout. Venturi aspirator with open end sight. 6" Elbow blade metal handle with eight-point tapered broach and secured, color-coded index button. Quatern™ quarter-turn renewable compression cartridge that closes with water pressure with tapered square broach to facilitate handle removal. Inlet shank contain standard 1/2" NPSM threaded inlets with coupling nut for connection to 3/8" or 1/2" standard flexible riser. All mounting hardware is included for standard lavatory installations. This product meets ADA requirements and is tested and certified to industry standards: ASME A112.18.1, NSF 61 Sec. 9, and CSA B125.

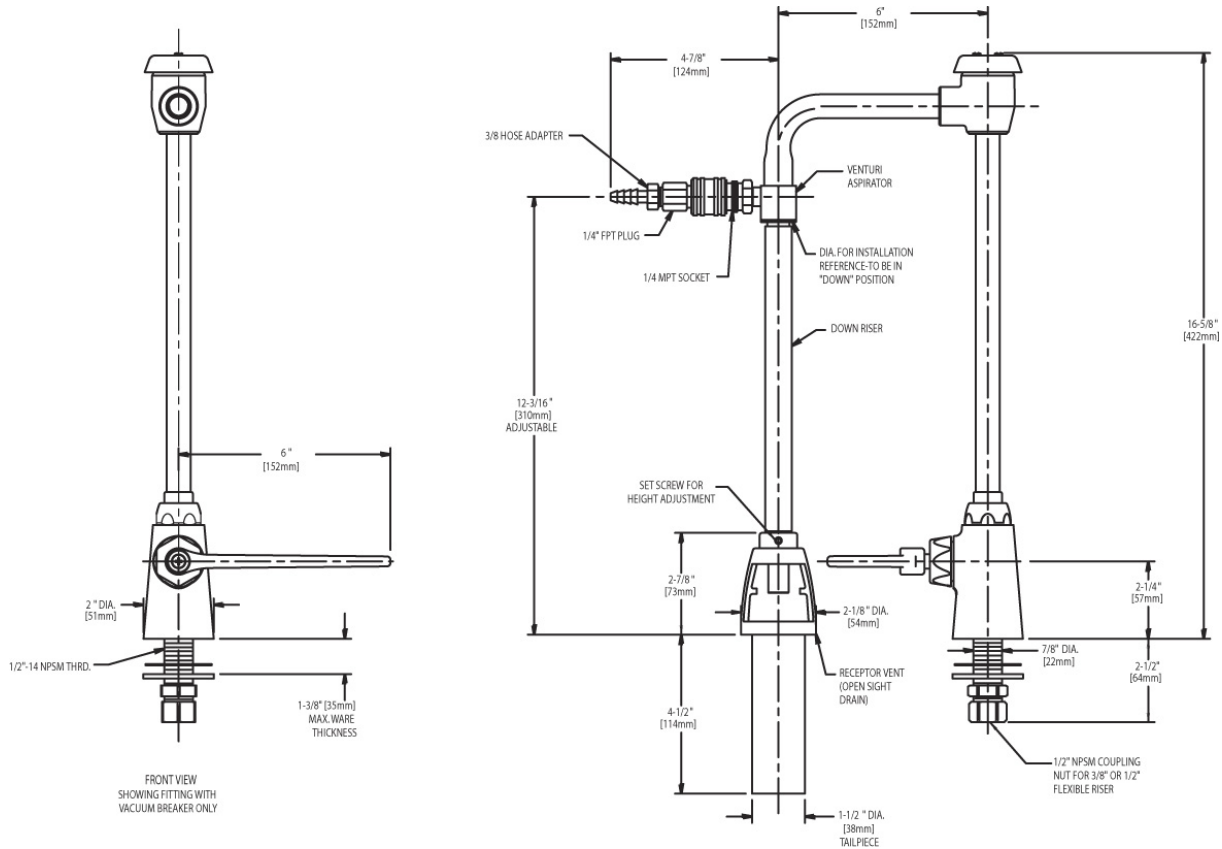

Operation and Maintenance

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at www.chicagofaucets.com.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.

