

Hi-Arc® Single-Lever Kitchen Faucet Model LKE4124F

FEATURES



- Three hole, single-lever top mount kitchen faucet
 - Three 1-1/2" (38.8mm) diameter faucet holes required
 - Maximum countertop thickness is 1" (25.4mm)
- Temperature and flow controlled by one movement of the single-lever handle
- Tubular high-arc, 360° swing spout with restricted flow aerator and brass escutcheon
- Highly polished, chrome plated finish
- Removable cartridge
- 3/8" (10mm) O.D.; 10" (254mm) long; copper tube connections
- 1/2" (12.7mm) I.P. adapters.
- Retractable spray and hose
- Ship Wt. 5-1/2 lbs. (2.5Kg)
- Maximum flow rate
 - 2.5 GPM/9.5 L/min at 80 P.S.I.G.
 - 2.2 GPM/8.3 L/min at 60 P.S.I.G.

WARRANTY

- Limited Lifetime

COMPLIES WITH:

- ADA
- ANSI/NSF61 - Certified
- ASME A112.18.1/CSA B125.1
- CA AB1953/VT S152

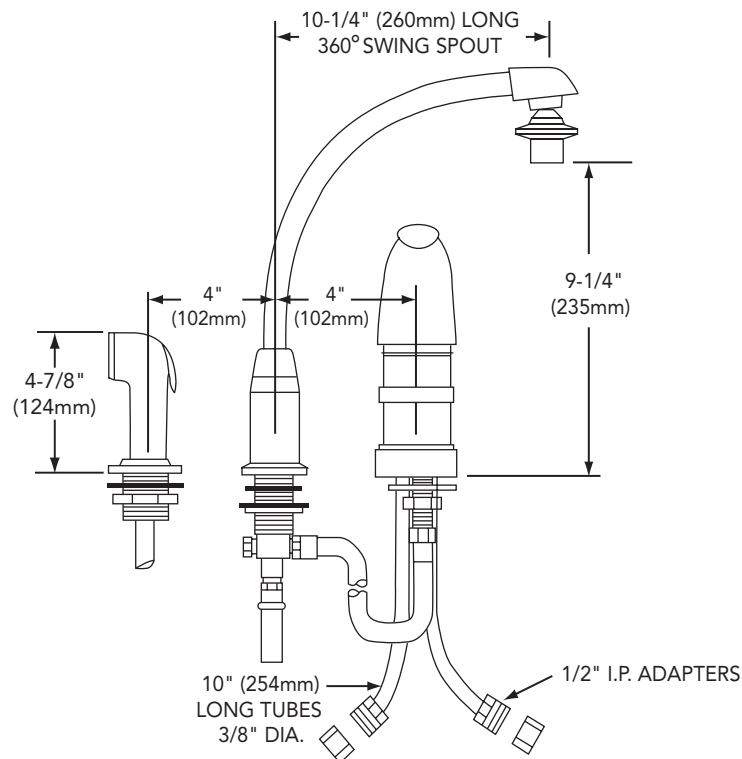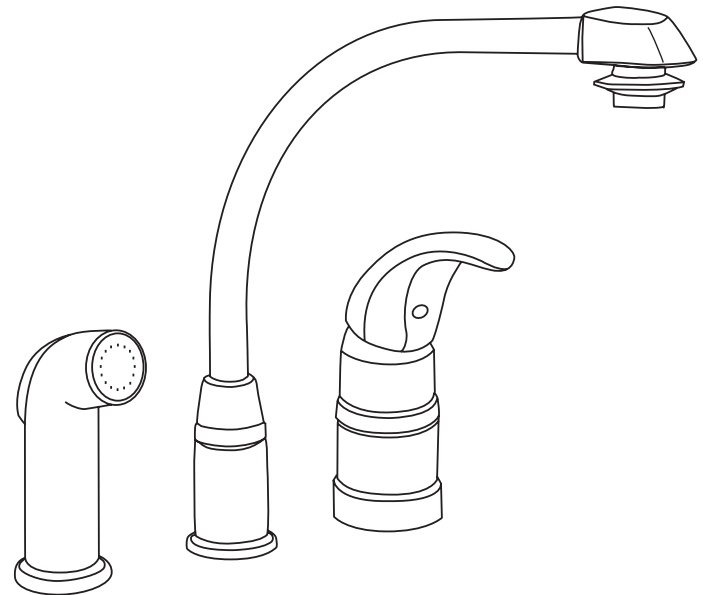

SEE OTHER SIDE FOR REPLACEMENT PARTS

Hi-Arc® Single-Lever Kitchen Faucet Model LKE4124F

ITEM	IND. PART	KIT PART	DESCRIPTION
1	N/A	A53667R	SPOUT ASSEMBLY
2	N/A		
3	N/A		
4	N/A		
5	P05102		
6	P48019	N/A	DIVERTER
7	P02116	A52814R	ESCUTCHEON SLEEVE ASSEMBLY
8	P35168		
9	P02114	N/A	FLANGE
10	P37119	N/A	O-RING
11	P35174	N/A	WASHER
12	P02119	N/A	LOCKNUT
13	P47087	N/A	WATERWAY
14	P48017	N/A	HOSE </td
15	P35105	N/A	MOUNTING HARDWARE
16	P47070	N/A	BASE
17	P02103	N/A	COUPLING NUT
18	P37122	N/A	O-RING
19	P47070	N/A	HOUSING
20	P36108	N/A	CARTRIDGE SCREW
21	A53226R	A52399R	CARTRIDGE ASSEMBLY
22	N/A		
23	P47063	N/A	HUB
24	P47045	N/A	DOME
25	N/A	A53080R	HANDLE ASSEMBLY
26	A55449R	N/A	SIDE SPRAY ASSEMBLY

