

Hand-Held Hose Spray, Deck-Mounted w/Dual Sprayhead

Model S19-460EFW & S19-465EFW

- Complies with American National Standard Z358.1-2004
- Deck-Mounted
- Acts as an Eye/Face Wash and Hand-Held Spray For Eyes and Face or Body Rinsing
- Full, One-Year Warranty

Specifications

Quick access emergency eye and face spray features soft flow dual sprayhead for flooding large areas as well as eyes only.

UPC and cUPC Approved:

The Emergency Fixtures are certified to comply with the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada by the International Association of Plumbing and Mechanical Officials (IAPMO).

Construction

8' (2438mm) yellow reinforced thermoplastic hose has 3/8" IPS male thread. Burst strength is 450 PSI.

Standard Equipment

Eye/Face Sprayhead


Perforated sprayheads are ABS plastic and feature soft flow dual sprayheads for flooding large areas as well as eyes only. Includes protective sprayhead covers. The integral flow assures safe, steady flow under varying water supply conditions. Highly visible yellow color.

Valve

Chrome plated brass w/ extended handle valve stays open once handle is squeezed.

Drench Hose

8' (2438mm) yellow reinforced thermoplastic hose has 3/8" IPS male thread. Burst strength is 450 PSI.

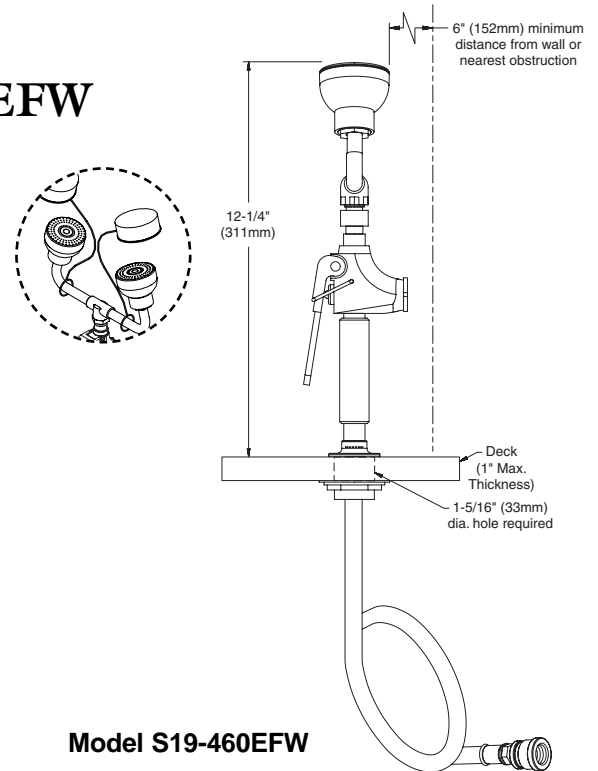

Model S19-460EFW

Model S19-460EFW is third-party certified to the ANSI Z358.1-2004 standard as an eye/face wash.

MODEL	
Model No.	Description
<input type="checkbox"/> S19-460EFW	Hand-Held Hose Spray, Deck-Mounted w/Dual Sprayhead
<input type="checkbox"/> S19-465EFW	Hand-Held Hose Spray, Deck-Mounted w /Angled Dual Sprayhead


IMPORTANT NOTES:

- Drench hoses must provide a controlled flushing fluid flow that is both tepid and non-injurious to the user per ANSI Z358.1-2004. Refer to ANSI Z358.1-2004 for complete regulatory information regarding the performance, installation, maintenance, and training requirements for drench hoses.
- Installer to supply backflow prevention as required by UPC, IPC and/or local plumbing codes. Contact Bradley or visit www.bradleycorp.com for available options.

Document No. 4810

This information is subject to change without formal notice.
© 2007 Bradley Corporation
1-15-2007 (1 Page Total)

EF4810.1

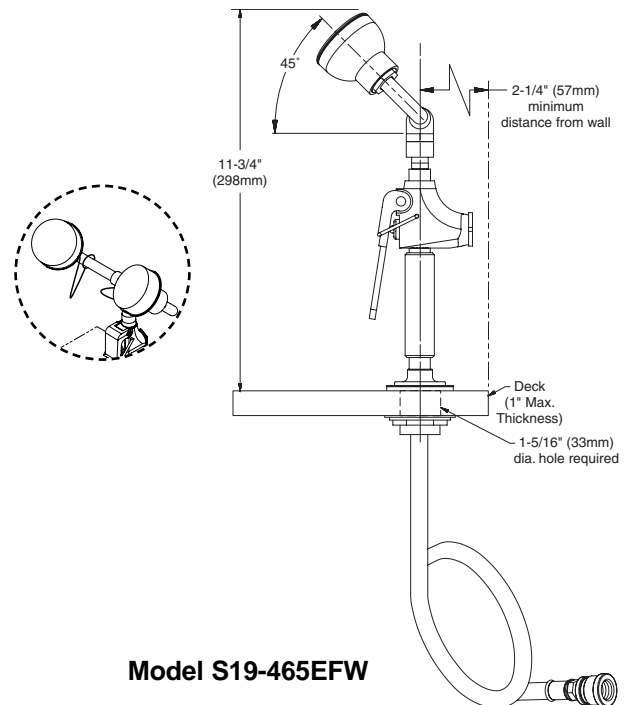

Model S19-465EFW



P.O. Box 309, Menomonee Falls, WI 53052-0309
Phone 1-800-BRADLEY FAX 262-251-5817
Web Site: <http://www.bradleycorp.com>